

HARDFACE LP-G

For Welding Professionals



The ideal hardfacing solution for out of position jobs.




HARDFACE LP-G is an out of position flux cored wire for gas shielded arc hardfacing that is suited to fight moderate abrasion and is resistant to impact and metal-to-metal wear.

The wire produces a medium alloy welding deposit and can be used on parts such as bucket lips, crusher jaws, crusher hammers, cutting tools, to name a few.

Extend the service life of your parts and reduce total cost of ownership by protecting them with HARDFACE LP-G.

Why choose this solution?

- Easy to use thanks to the slag properties
- Fast freezing slag
- Outstanding slag release
- Applicable in multi layers (2-3) without cracks
- Self tempering deposit
- High deposition rate compared to standard 600HB solid wire (+20-25%)

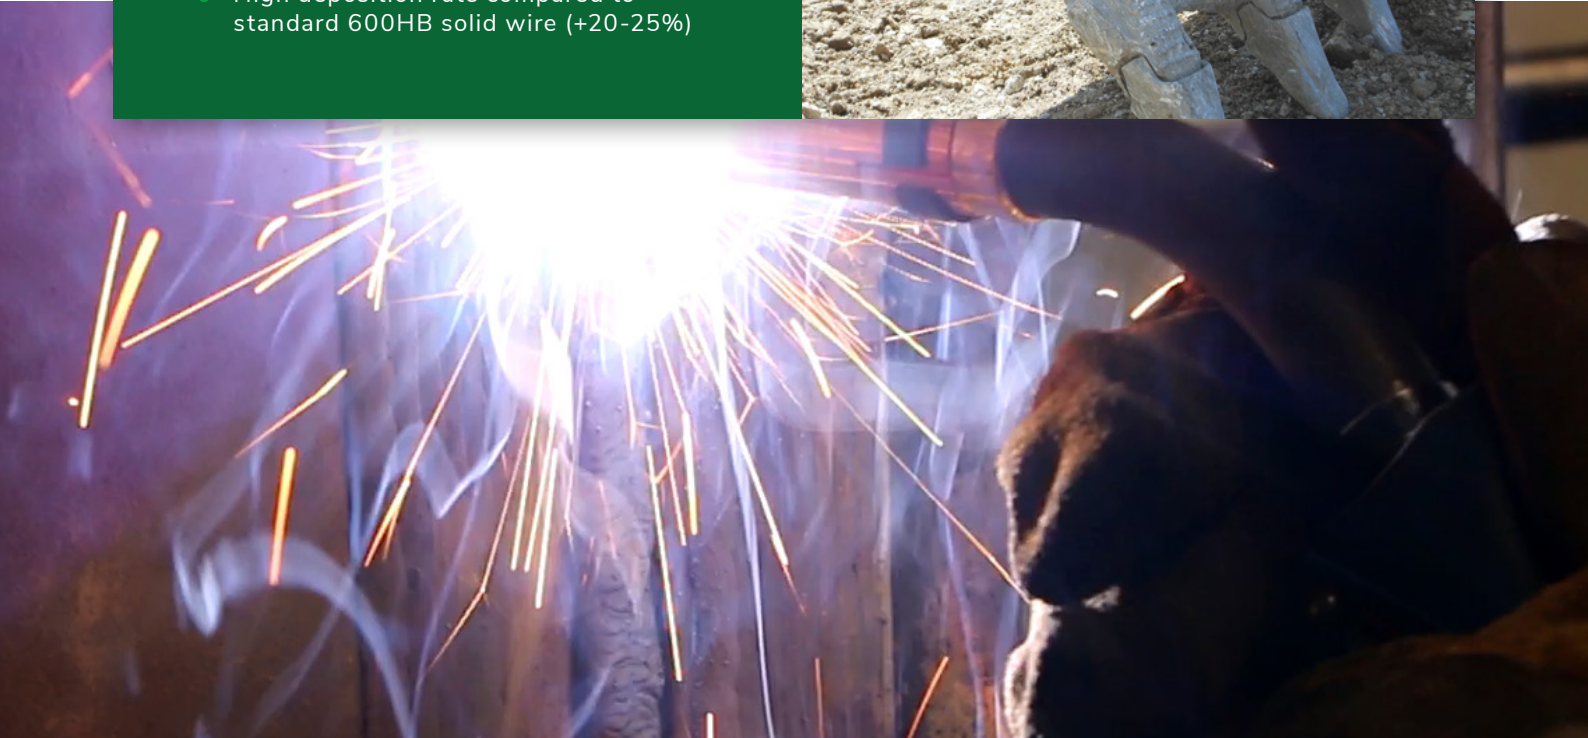


Product details

EN ISO Classification : EN 14700: T Fe3

Available diameter: 1.2 mm

Hardness: 55 HRC (As welded-Single layer on mild steel)

Welding Positions:



YouTube

Scan the code to see our video for **HARDFACE LP-G**

contactus@welding-alloys.com
www.welding-alloys.com

